



coolenergy

TEMPERATURE RENTAL

10kW Rental LT Fan Coil




ABOUT THE AIR HANDLER

Cool Energy's 10kW Low Temperature fan coil is a flexible triple fan unit capable of offering 7,700m³/hr airflow. The unit requires a water source to the integral coil and has quick-release water connections, together with a 16amp 3-phase power connection.

The fan coil is sited internally and can be supplied with or without an independent low temperature defrost panel to offer a nominal 0°C air off temperature, capable of offering stability to a 4°C room or below.

The unit is also supplied with a condensate hose, real timer defrost control panel (to manage both coil and condensate tray heater element defrost), together with optional warehouse stands built to order.

Derate Graph

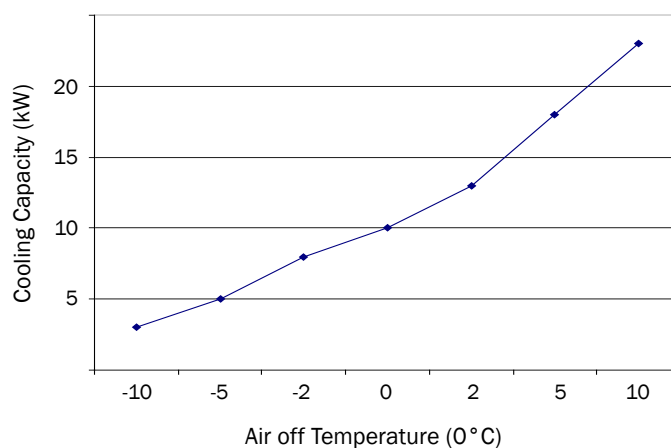

TECHNICAL

Low Temperature 10kW Rental Fan Coil

Performance data @ design conditions

Cooling Capacity	kW	10
Air Off Temperature	°C	0
Air On Temperature	°C	4
Water/Glycol mix in (min 25%)	°C	-8
Water/Glycol mix out	°C	-4

Cooling Operating limits

Min/Max Duty	kW	5/25
Min/Max Air Off Temperature	°C	-5/20
Fluid Pressure Drop	kPa	51.1
Max Working Pressure	kPa	2,400
Evaporator Water Volume	l	7.4
Condensate Connection (hose tail)	mm/inches	20/ 3/4

Air Limits

Total Number Fans	0.4kW each	3
Fan Diameter	mm	350
Total Airflow	m ³ /hr	7,700
	m ³ /s	2.14
Max Air Throw	m	26

Electrical data

Electrical Supply Voltage 3 phase	V	400
Power Connections (without defrost)	A	16 C forme plug (3 PIN)
Power Connections (with defrost)	A	16 C forme Plug (3 PIN)
Max Power Absorbed	kW	2.4/7.6
Max Current Absorbed (without/with defrost)	A	2.7/8.5
Starting Current (Max)	A	4.0
Recommended Generator Set (without/with defrost)	kVA	N/A
Control System		Carel pCO ³

Sound Data

Sound Pressure Level at 10 metres (ISO3744)	dB(A)	64
---	-------	----

Physical Data

	Option	No Frame	With Frame
Overall Length	mm	1,975	2,200
Overall Width	mm	460	800
Overall Height	mm	487	800
Weight Dry	kg	62	162
Weight + Water/Glycol mix	kg	70	170
Fluid Coupling Size	mm/inch	25/1	
Fluid Coupling Type	Std	1" Camlock	

Head Office South

ICS House, Stephenson Road, Calmore Industrial Estate, Totton,
SO40 3RY
T (+44) 23 8052 7300 F (+44) 23 8042 8366

Midlands

Birmingham Science Park Aston, Faraday Wharf, Holt Street, Birmingham B7 4BB
T (+44) 121 326 7771 F (+44) 121 327 4114

North

Floor 2, Caspian House, East Parade, Little Germany, Bradford BD1 5EP
T (+44) 1274 740 877 F (+44) 1274 391 708

Scotland

Unit 5, 53/58 South Avenue, Blantyre Industrial Estate, Blantyre,
G72 0XB
T (+44) 1698 723308 F (+44) 1698 723309

Ireland

Unit 2, Kells Enterprise Centre, Cavan Road, Kells, County Meath,
Ireland
T (+353) 46 925 2934 F (+353) 46 925 2936

We also have four locations in Germany, Holland and Switzerland.
Further information on these locations can be found at www.coolenergy.eu

www.coolenergy.co.uk